

Elevador de Cangilones BE / Plastic Bucket Elevator BE

FUNCIÓN

Los elevadores de cangilones son necesarios para el transporte vertical a granel de todo tipo de cereales, semillas, productos industriales y plásticos. Se puede adaptar a cualquier requerimiento de capacidad y altura necesario.

PRINCIPIO DE FUNCIONAMIENTO



Esta máquina puede elevar una gran variedad de materiales a granel. El elevador BE, recoge el producto desde una tolva y lo sube hasta la altura requerida mediante unos vasos o cangilones atornillados a una correa que discurre entre una polea de pie y otra de cabeza situada en la parte superior donde se produce la descarga. El elevador BE estándar, está construido de tal manera que puede adaptarse a las mas variadas necesidades del cliente.

FUNCTION

The plastic bucket elevators are necessary for bulk transport of all types of grain and seeds. They can be adjusted to any capacity and height needed.

OPERATING PRINCIPLE

This machine can transport a big variety of bulk materials all grains and seed. The BE Elevator, picks up the product from a hopper and raises it up to the required height through the plastic buckets screwed to a strap, running through a standing pulley and a head pulley, located in the top part where the discharge is done. The standard elevator BE, is built in a way so it can be adjusted to the most varied needs of the client.

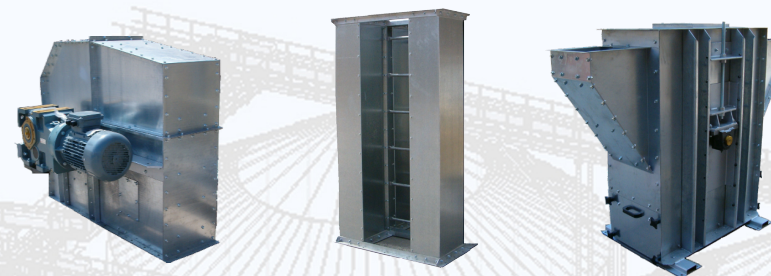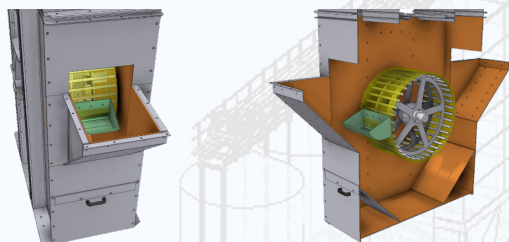

CARACTERISTICAS DISTINTIVAS

- Construcción altamente flexible para satisfacer una amplia gama de requerimientos (altura, ancho de banda, velocidad de cinta y elementos de seguridad).
- Correa en material antiestático resistente al desgaste.
- La estructura del elevador unida por medio de tuercas y tornillos para un fácil mantenimiento o ampliación futura.
- Diseño totalmente cerrado ofreciendo máxima seguridad durante la operación.
- Vasos de plástico o metálicos según producto a elevar.
- El elevador puede ser de acero al carbono pintado, de acero inoxidable o galvanizado.

ACCESORIOS

A requerimiento del cliente, estas máquinas se subministran con diferentes tipos de accesorios: Control de atascos, regulación de velocidad, control de banda, temperatura de rodamientos y paneles de explosión, mando con cuadro eléctrico local o remoto.

DISTINTIVE FEATURES

- Built with a very flexible process so it can satisfy a wide range of requirements (height, bandwidth, security elements).
- Strap made of antistatic material and wear resistant.
- The structure of the elevator is joined with nuts and bolts so its easier to apply maintenance or future extension.
- All internal mechanical pieces remain closed in the interior of the box structure to prevent security meanwhile operating.
- Plastic or metal buckets, depending on the material to be raised.
- The elevator can be made in painted carbon steel, stainless steel or galvanized.

ACCESSORIES

By order of the client, this machines can be supplied with different types of accessories: Jam control, speed regulator, band control, bearings temperature, explosion panels, control panel (local or remote)

Engineering 2.1 – Where technology meets people

A new world of possibilities that you never dreamed of

Nuestra marca exclusiva
Our exclusive brand




BALLARINI SOCAMA
Italian Technology since 1884

NIKAMI ENTERPRISE, S.L.
 Avinguda Cambra de Comerç, 42
 Tecnoparc Edifici CEPID
 43204 Reus (Tarragona) - SPAIN
 Tel : +34 877 449 842
 Fax : +34 977 276 965
 Web : www.nikami.eu
 E-mail : info@nikami.eu

ELEVADOR DE CANGILONES BE / PLASTIC BUCKET ELEVATOR BE

Modelo BE / BE Model


		100	150	200	250	300	350	400	450	500
Dimensiones / Measurements (mm)	A	460	550	706	785	1000	1150	1350	1600	1600
	B	424	555	706	825	1110	1250	1430	1900	1900
	C	173	222	285	370	410	450	580	580	900
	D	441	500	660	680	1250	1630	1825	2000	2000
	E	780	880	1110	1200	1525	1710	2205	2500	2500
Capacidad / Capacity (m3/h)		17	34	85	138	200	230	357	420	700
Peso pie / Stand weight (kg)		90	102	122	154	198	305	395	400	600
Peso cabeza sin motor / Weight of head non engine (kg)		80	113	132	166	228	345	430	500	715
Peso Caña elevador / Intermediate cane weight (Kg/m)		30	47	55	74	89	110	122	140	160

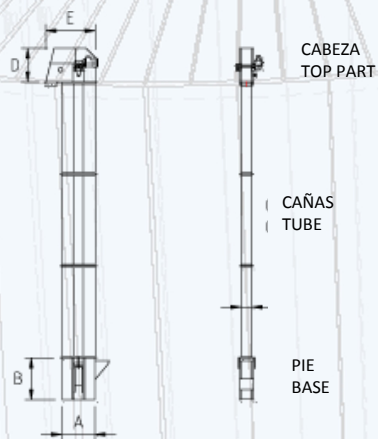

Ballarini Socama is a registered Brand of Nikami

* Nos reservamos el derecho de efectuar modificaciones en nuestros fabricados, sin previo aviso.
 * We reserve the right to make any modifications in our products or designs, without any notice.

Elevador de Cangilones BE
Plastic Bucket Elevator BE

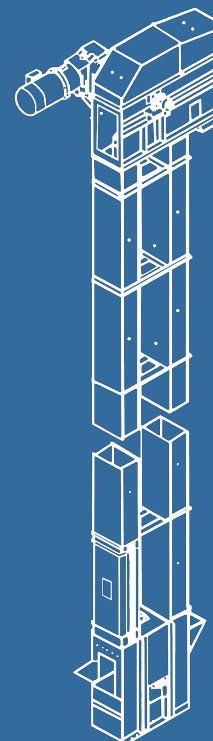

Engineering 2.1 – Where technology meets people



A new world of possibilities that you never dreamed of