
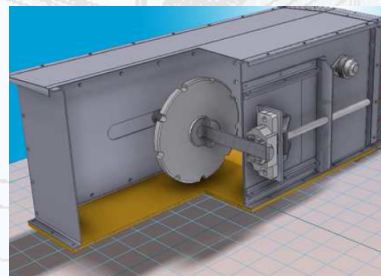


Transportador de Cadena CC / Chain Conveyor CC

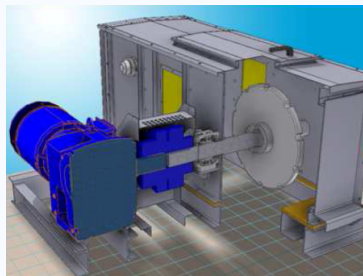

FUNCIÓN

Los transportadores de cadena, de la serie CC, se adaptan para los más diversos transportes industriales : agrícolas, minerales, plásticos, etc. Su baja velocidad de tránsito también lo hace apto para todo tipo de productos, sin dañarlos.

PRINCIPIO DE FUNCIONAMIENTO



Una cadena de transporte con las aletas laterales, se desliza por el interior de un canal de sección rectangular, con o sin fondo anti desgaste. El material se desplaza con la cadena a su misma velocidad, siendo ésta el soporte de la masa transportada.

FUNCTION

The Chain Conveyors CC can be adapted for lots of different types of industrial applications for any agricultural, plastic or inert material and product. It's low transport speed makes it suitable for all type of seeds, delicate grains, without damaging.

OPERATING PRINCIPLE

A transport chain with scrappers slides trough the interior of a rectangular channel with or without anti-wear plates. The Product slides at the same speed as the chain, being the chain who supports the transported weight.



CARACTERÍSTICAS DISTINTIVAS

- Las entradas y las salidas del producto se pueden hacer en diverso número y cualquier punto de la caja.
- Su construcción es totalmente hermética, permite su instalación en intemperie sin que las inclemencias meteorológicas afecten el producto transportado.
- El transportador está ensamblado por medio de tuercas y tornillos para un fácil mantenimiento o ampliación futura.
- Tiene una gran aplicación en la distribución de los sólidos y de granel, el llenado de naves y en la carga y descarga de tolvas y silos.
- Ocupa muy poco espacio y su construcción hermética reduce la emisión de polvo.
- El transportador puede ser de acero al carbono pintado, de acero inoxidable o galvanizado.

ACCESORIOS

A requerimiento del cliente, estas máquinas se suministran con diferentes tipos de accesorios: Control de atascos, regulación de velocidad, temperatura de rodamientos, cuadro de mando local o remoto, etc.

DISTINCTIVE FEATURES

- *The inputs and outputs of the product can be done in different number and at any point of the machine.*
- *It has a totally sealed structure, allowing the machine to be installed in the exterior, without any corrosion or problems derived by extreme weather.*
- *The transporter is assembled with bolts and nuts, so it's easy to apply maintenance or a future extension.*
- *Has a great use for distribution of solids and bulk, filling up of storage shields, loading and unloading hoppers and grain warehouse.*
- *Occupies very little space and it's hermetic construction reduces the dust emissions.*
- *The transporter can be made of carbon painted steel, stainless steel or galvanized.*
- *It may be supplied with or without a control panel, local or remote.*

ACCESSORIES

This machines may be supplied with different types of accessories: Jam control, speed regulator, alignment sensors, bearing temperature control, explosion panels, etc.

Engineering 2.1 – Where technology meets people

A new world of possibilities that you never dreamed of


Nuestra marca exclusiva
Our exclusive brand



BALLARINI SOCAMA
Italian Technology since 1884

NIKAMI ENTERPRISE, S.L.
 Avinguda Cambra de Comerç, 42
 Tecnoparc Edifici CEPID
 43204 Reus (Tarragona) - SPAIN
 Tel : +34 877 449 842
 Fax : +34 977 276 965
 Web : www.nikami.eu
 E-mail : info@nikami.eu

Transportador de Cadena CC Chain Conveyor CC

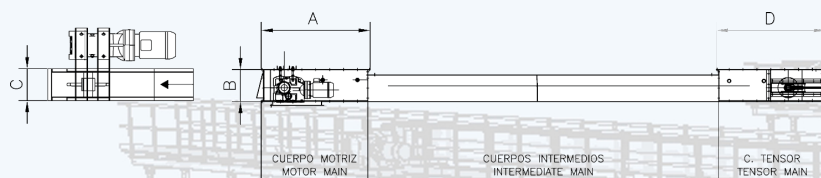

TRANSPORTADOR DE CADENA CC / CHAIN CONVEYOR CC							
Modelo CC / CC Model		CC-40	CC-60	CC-120	CC-150	CC-200	CC-250
Dimensiones / Measurements (mm)	A	1000	1000	1500	1500	1500	1500
	B	395	465	465	465	586	666
	C	230	300	400	490	490	500
	D	1000	1000	1500	1500	1500	1500
Capacidad / Capacity	m3/h	53	80	160	200	266	333
Peso tr. Motriz sin motor/ weight head without motor	kg	97	130	165	180	220	275
Peso tramo tensor / Weight tensor foot	Kg	90	120	135	170	200	245
Peso tramo intermedio Intermediate body weight	kg/m	50	65	90	110	160	170

Ballarini Socama is a registered Brand of Nikami

* Nos reservamos el derecho de efectuar modificaciones en nuestros fabricados, sin previo aviso.
 * We reserve the right to make any modifications in our products or designs, without any notice.

Engineering 2.1 – Where technology meets people

